

**UTILITY PATENT APPLICATION
TRANSMITTAL UNDER 37 CFR 1.53(b)**

ATTORNEY DOCKET 78137RLO

To: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Express Mail Label No.

EM364956548US

Date:

8/10/98

RECEIVER HAVING HYDROPHILIC
RECEIVING SURFACE

First Named Inventor (or Application Identifier):

Gustavo R. Paz-Pujalt, et al

Enclosed are:

1. ☒ Specification
2. ☐ Sheet(s) of drawing(s)
3. ☒ Disclosure Statement Under 37 C.F.R. 1.97.
4. Combined Declaration for Patent Application and Power of Attorney:
 - 4a. ☒ New
 - 4b. ☐ Copy from a prior application (37 CFR 1.63(d) (for continuation/divisional with Box 11 completed)
5. ☐ Incorporation by Reference (useable if Box 4b is checked)
6. ☒ Assignment of the invention to **Eastman Kodak Company**
7. ☐ Certified copy of a priority
8. ☐ Associate Power of Attorney

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

10. ☐ Prior to examination of the above-identified application, amend the specification at Page 1, after the title, by inserting the following:

--CROSS REFERENCE TO RELATED APPLICATION

Reference is made to and priority claimed from U.S. Provisional Application Serial No. , filed , entitled ,

If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

11. ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. :
12. ☒ Please address all written communications to Thomas H. Close, Patent Legal Staff, Eastman Kodak Company, 343 State Street, Rochester, NY 14650-2201.
Please Direct all telephone calls to Raymond L. Owens at (716) 477-4653.

The filing fee has been calculated as shown below:

FOR:	NO. FILED	NO. EXTRA	OTHER THAN A SMALL ENTITY	
			RATE	FEE
BASIC FEE				\$ 790
TOTAL CLAIMS	12 - 20 =	0	x 22 =	\$ 0
INDEPENDENT CLAIMS	3 - 3 =	0	x 82 =	\$ 0
MULTIPLE DEPENDENT CLAIM PRESENTED			+ 270	\$0
			TOTAL	\$ 790

- ☒ Please charge my Eastman Kodak Company Deposit Account No. **05-0225** in the amount of **\$ 790**.

A duplicate copy of this sheet is enclosed

- ☒ The Assistant Commissioner is hereby authorized to charge any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Eastman Kodak Company Deposit Account No. **05-0225**.

A duplicate copy of this sheet is enclosed.

Date

8/10/98

Raymond L. Owens/das
Telephone: (716) 477-4653
Facsimile: (716) 477-4646

Attorney for Applicants
Registration No. 22,363

ORIGINAL PATENT APPLICATION BASED ON:

Docket: 78137RLO

Inventor(s): Gustavo R. Paz-Pujalt
David L. Patton
John R. Fredlund

Attorney: Raymond L. Owens

RECEIVER HAVING HYDROPHILIC RECEIVING SURFACE

EXPRESS MAIL LABEL NO.: EM364956548US

Date of Mailing: 8/10/98

RECEIVER HAVING HYDROPHILIC RECEIVING SURFACE
FIELD OF THE INVENTION

The present invention relates to providing a water-based colorant image on a receiver having an information image.

BACKGROUND OF THE INVENTION

Heretofore images of high quality have been produced by thermal printers. In a typical thermal printer an image is formed in three passes. First a colorant patch having color such as yellow is placed in transfer relationship with a receiver and then the colorant patch is heated in a pattern corresponding to the yellow portion of an image to be completed. Thereafter, cyan and magenta portions of the image are formed in a similar fashion. The completed color image on the receiver is continuous tone and in many cases can rival photographic quality.

In one type of thermal printer which prints colored images, a donor contains a repeating series of spaced frames of different colored heat transferable colorants. Thermal colorant transfer printers offer the advantage of true "continuous tone" density transfer. This result is obtained by varying the energy applied to each heating element, yielding a variable density image pixel in the receiver. The donor is disposed between a receiver, such as coated paper, and a print head formed of, for example, a plurality of individual heating resistors. When a particular heating resistor is energized, it produces heat and causes colorant from the donor to transfer to the receiver. The density or darkness of the printed color colorant is a function of the energy delivered from the heating element to the donor.

Under common circumstances after an image is printed, a protective layer of material is coated in order to prevent damage to the image. Commonly-assigned U.S. Patent No. 5,369,077 teaches that silicone block copolymers are added to the receiver and receiver overcoat to prevent sticking to the colorant patch. Though this effectively protects the image it hurts the ability to affix information carried by a water soluble inks or pigments, for example a rubber stamp mark. Rubber or polymer stamp marks normally consist of water

soluble inks or pigments. Images produced using a thermal printing process provide a convenient method for creating images for use as identification, for example as passport and visa pictures and small pictures that are attached to school, job or club applications. When pictures are used for identification

- 5 purposes, the pictures and the documents to which they are attached may require some type of official stamp. In most cases the stamp is an official seal made of rubber. The rubber stamp is used to apply the official seal to the document and picture. The marking medium is a water soluble ink or pigment that is readily absorbed by the material to which it is applied. In the case of thermal media
- 10 during the printing process a protective transparent layer is coated that is water resistant thus making the adhesion of a rubber stamp impossible. Commonly-assigned U.S. Patent No. 5,614,464 teaches the addition of perfluorinated alkyl sulfonamide ester copolymers to improve receiver writeability. This coating on the other hand may help the adherence of water based inks or dyes.

15 SUMMARY OF THE INVENTION

It is an object of the present invention to produce a surface that will accept information carried in a water-based colorant as is the case of a rubber or polymer stamp.

- 20 The object is achieved by: a receiver for receiving a water-based colorant image transferred by a stamp or the like, comprising:

- (a) an image receiving structure having:
 - (i) a support;
 - (ii) an information receiving layer which contains recorded information, such information receiving layer being formed over the
 - 25 support; and
 - (iii) a clear hydrophobic protective layer formed over the information receiving layer; and
 - (b) a hydrophilic layer formed over the information receiving layer and selected so as to be able to receive a water-based colorant image.

In a preferred embodiment of this invention the hydrophilic layer is provided by a gelatin or other material with similar surface properties formulated with the appropriate surfactants so that it can adhere to the clear hydrophobic protective layer.

5 In another embodiment of this invention the hydrophobic protective layer and the hydrophilic layer can be applied from patches on a donor element which also includes patches having colorants for forming the information image.

An advantage of the present invention is that the hydrophilic layer can be formed on a receiver which already has received an information image.

10 A feature of the invention is that the hydrophilic layer can readily receive water-based colorant images transferred from a rubber stamp.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic block diagram of a thermal printing apparatus which makes dye images in a receiver in accordance with the present invention;

15 FIG. 2 is a cross-sectional view of a receiver which is used in the apparatus of FIG. 1;

FIG. 3 shows a strip of a typical colorant donor element in web format which can be used by the apparatus shown in FIG. 1;

20 FIG. 4 is a cross-sectional view of a receiver which is used in the apparatus of FIG. 1 showing a thermal printer coating assembly coating a receiver structure of the print;

FIG. 5 is a front view of a thermal printer with a coating assembly coating a receiver structure of the print;

FIG. 6 is a sectional view taken along the lines A-A of FIG. 5;

25 FIG. 7 shows a side view of a rubber stamp applying a stamp image on the surface of the finished print;

FIG. 8 shows an image that the rubber stamp of FIG. 7 has applied to on the surface of the finished print; and

30 FIG. 9 shows a strip of typical colorant donor element in web format having colorant patches, a clear hydrophobic patches and a clear hydrophilic patch.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

- Referring to FIG. 1 where a thermal printer apparatus 10 employs receivers 12 and a colorant donor element 14 in the form of a web. Receivers 12, in the form of a sheet is serially fed from a tray 16 to a print position by a
- 5 conventional sheet feeding mechanism, not shown. The thermal printer apparatus 10 uses a colorant donor element 14 which typically employs a colorant that is a dye. Upon heating dye is transferred to a dye receiving element. However, pigments can also be used and the present invention is equally applicable when the printer apparatus is an ink jet printer. Because in any of these situations, a
- 10 hydrophilic image from a stamp or the like is transferred to a hydrophilic layer as will be described below.

- Now referring to FIG. 2, the receiver 12 is comprised of an image receiving structure 50 which includes a support 56. The support 56 can be formed of paper or plastic such as polyethylene terephthalate or polyethylene
- 15 naphthlate. Alternatively, it can be in the form of a web. Upon each support 56 will be an image receiving layer 60 for receiving colorant from the colorant donor element 14 to form information images. When dye is the colorant a barrier layer 58 is provided to prevent the dye from bleeding into the support 56. In such a situation the image receiving layer 60 is formed on the barrier layer 58.

- 20 Referring back to FIG. 1, in operation, a platen 18 is moved into print position by an actuator 20 pressing the receiver 12 against the colorant donor element 14. Actuators are well known in the field and can be provided by a mechanical linkage, solenoid, and small piston arrangement or the like. The colorant donor element 14, shown in FIG. 3 as a web, includes a series of colorant
- 25 patches. These colorant patches can be cyan, yellow, and magenta 64a, 64b, 64c, respectively, and they are sequentially moved into image transferring relationship with the colorant donor element 14. Each series of colorant patches 64a-c is followed by a protective coating patch 66 which is formed of a material that can form a clear hydrophobic protective layer 62.

The colorant donor element 14 is driven along a path from a supply roller 24 onto a take-up roller 26 by a drive mechanism 28 coupled to the take-up roller 26. The drive mechanism 28 includes a stepper motor which incrementally advances and stops the colorant donor element 14 relative to the receiver 12.

- 5 A control unit 30 having a microcomputer converts digital signals corresponding to the desired image from a computer 32 to analog signals and sends them as appropriate to the optical system 38 which modulates the laser beam produced by a laser light source 34. The laser light source 34 illuminates the colorant donor element 14 and heats such colorant donor element 14 to cause the
- 10 transfer of colorant to the image receiving layer 60 of the image receiving structure 50. This process is repeated until an information image is formed on each of the image receiving structures 50. Alternatively, a plurality of donor resistive elements (not shown) which are in contact with the colorant donor element 14. When a donor resistive element is energized it is heated which causes
- 15 colorant to transfer from the colorant donor element 14 to the receiver 12 in a pattern to provide an information image. For a more complete description of this type of thermal printing apparatus reference is made to commonly assigned U.S. Patent No. RE 33,260. Of course the process has to be repeated using the cyan, yellow and magenta patches 64a-c to complete the information image. An
- 20 additional pass consists of transferring a clear hydrophobic protective layer 62.

- Now referring to FIG. 4, the image receiving layer 60 of the image receiving structure 50 has received an information image by the transference of the colorant donor element 14 using the thermal printer apparatus 10. After the colorant donor element 14 has formed the information image, the clear
- 25 hydrophobic protective layer 62 is transferred using the thermal printer apparatus 10. As the image receiving structure 50, exits the thermal printing apparatus 10 in the direction indicated by arrow 69 a hydrophilic mixture 70 such as a layer consisting of gelatin or other material with similar surface properties formulated with the appropriate surfactants such as Alkanol XC, Triton 200 or Aerosol OT is
- 30 applied to the clear hydrophobic protective layer 62 via an applicator assembly 72 comprised of a reservoir 74, an applicator 76 and a drive mechanism 78 to form a

hydrophilic coating 80. The applicator 76 can also apply other materials such as the synthetic polymers to provide the clear hydrophilic layer 80 which are selected from the group consisting of polyvinylpyrrolidone (PVP), polyester ionomers, polyethylene oxide and copolymers of vinyl alcohol.

5 Now referring to FIGS. 5 and 6 which show portions of a thermal printer 82 is equipped with an applicator assembly 72. As the thermal print 84 exits the thermal printer 82 a hydrophilic mixture 70 including gelatin or other material with similar surface properties formulated with the appropriate surfactants is applied to the thermal print 84 via an applicator 76 and drive mechanism 78. A drive mechanism (not shown) for the thermal printer 82 is used in conjunction with the drive mechanism 78 (see FIG. 4) to drive the thermal print 84 through the applicator 76.

Alternatively, a hydrophilic mixture 70 including gelatin or other material with similar surface properties formulated with the appropriate surfactants is applied to the clear hydrophobic protective layer 62 via an aerosol 15 sprayer to form a hydrophilic coating 80.

Still further in another embodiment, a hydrophilic mixture 70 including gelatin or other material with similar surface properties formulated with the appropriate surfactants is applied to the clear hydrophobic protective layer 62 20 via an roller to form a hydrophilic coating 80.

Now referring to FIG. 7, a thermal print 84 is shown in a side view. A hydrophilic coating 80 has been applied to the clear hydrophobic protective layer 62 of the thermal print 84. A rubber stamp 88 is used to apply an official seal 92 to the thermal print 84 as shown in FIG. 8 having an information 25 image 90. The colorants applied by the rubber or polymer stamp 88 should of course be hydrophilic and they can be for example, dyes or pigments. The inks containing these colorants are well known in the art and are described in U.S. Patent Nos. 5,672,198 and 4,469,464.

In another embodiment the colorant donor element 14, shown in 30 FIG. 9 as a web, includes a series of colorant patches 64a-c. These colorant patches can be cyan, yellow, and magenta 64a, 64b, 64c, respectively, and they are

- sequentially moved into image transferring relationship with the colorant donor element 14. Each series of colorant patches 64a-c is followed by a protective coating patch 66 which in turn is followed by a hydrophilic patch 110. An additional pass includes transferring a hydrophilic patch 110. The transferal of the
- 5 hydrophilic patch 110 creates a clear hydrophilic layer 80 over the clear hydrophobic protective layer 62 of the thermal print 84.

The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

FIG. 1
FIG. 2
FIG. 3
FIG. 4
FIG. 5
FIG. 6
FIG. 7
FIG. 8
FIG. 9
FIG. 10
FIG. 11
FIG. 12
FIG. 13
FIG. 14
FIG. 15
FIG. 16
FIG. 17
FIG. 18
FIG. 19
FIG. 20
FIG. 21
FIG. 22
FIG. 23
FIG. 24
FIG. 25
FIG. 26
FIG. 27
FIG. 28
FIG. 29
FIG. 30
FIG. 31
FIG. 32
FIG. 33
FIG. 34
FIG. 35
FIG. 36
FIG. 37
FIG. 38
FIG. 39
FIG. 40
FIG. 41
FIG. 42
FIG. 43
FIG. 44
FIG. 45
FIG. 46
FIG. 47
FIG. 48
FIG. 49
FIG. 50
FIG. 51
FIG. 52
FIG. 53
FIG. 54
FIG. 55
FIG. 56
FIG. 57
FIG. 58
FIG. 59
FIG. 60
FIG. 61
FIG. 62
FIG. 63
FIG. 64
FIG. 65
FIG. 66
FIG. 67
FIG. 68
FIG. 69
FIG. 70
FIG. 71
FIG. 72
FIG. 73
FIG. 74
FIG. 75
FIG. 76
FIG. 77
FIG. 78
FIG. 79
FIG. 80
FIG. 81
FIG. 82
FIG. 83
FIG. 84
FIG. 85
FIG. 86
FIG. 87
FIG. 88
FIG. 89
FIG. 90
FIG. 91
FIG. 92
FIG. 93
FIG. 94
FIG. 95
FIG. 96
FIG. 97
FIG. 98
FIG. 99
FIG. 100
FIG. 101
FIG. 102
FIG. 103
FIG. 104
FIG. 105
FIG. 106
FIG. 107
FIG. 108
FIG. 109
FIG. 110
FIG. 111
FIG. 112
FIG. 113
FIG. 114
FIG. 115
FIG. 116
FIG. 117
FIG. 118
FIG. 119
FIG. 120
FIG. 121
FIG. 122
FIG. 123
FIG. 124
FIG. 125
FIG. 126
FIG. 127
FIG. 128
FIG. 129
FIG. 130
FIG. 131
FIG. 132
FIG. 133
FIG. 134
FIG. 135
FIG. 136
FIG. 137
FIG. 138
FIG. 139
FIG. 140
FIG. 141
FIG. 142
FIG. 143
FIG. 144
FIG. 145
FIG. 146
FIG. 147
FIG. 148
FIG. 149
FIG. 150
FIG. 151
FIG. 152
FIG. 153
FIG. 154
FIG. 155
FIG. 156
FIG. 157
FIG. 158
FIG. 159
FIG. 160
FIG. 161
FIG. 162
FIG. 163
FIG. 164
FIG. 165
FIG. 166
FIG. 167
FIG. 168
FIG. 169
FIG. 170
FIG. 171
FIG. 172
FIG. 173
FIG. 174
FIG. 175
FIG. 176
FIG. 177
FIG. 178
FIG. 179
FIG. 180
FIG. 181
FIG. 182
FIG. 183
FIG. 184
FIG. 185
FIG. 186
FIG. 187
FIG. 188
FIG. 189
FIG. 190
FIG. 191
FIG. 192
FIG. 193
FIG. 194
FIG. 195
FIG. 196
FIG. 197
FIG. 198
FIG. 199
FIG. 200
FIG. 201
FIG. 202
FIG. 203
FIG. 204
FIG. 205
FIG. 206
FIG. 207
FIG. 208
FIG. 209
FIG. 210
FIG. 211
FIG. 212
FIG. 213
FIG. 214
FIG. 215
FIG. 216
FIG. 217
FIG. 218
FIG. 219
FIG. 220
FIG. 221
FIG. 222
FIG. 223
FIG. 224
FIG. 225
FIG. 226
FIG. 227
FIG. 228
FIG. 229
FIG. 230
FIG. 231
FIG. 232
FIG. 233
FIG. 234
FIG. 235
FIG. 236
FIG. 237
FIG. 238
FIG. 239
FIG. 240
FIG. 241
FIG. 242
FIG. 243
FIG. 244
FIG. 245
FIG. 246
FIG. 247
FIG. 248
FIG. 249
FIG. 250
FIG. 251
FIG. 252
FIG. 253
FIG. 254
FIG. 255
FIG. 256
FIG. 257
FIG. 258
FIG. 259
FIG. 260
FIG. 261
FIG. 262
FIG. 263
FIG. 264
FIG. 265
FIG. 266
FIG. 267
FIG. 268
FIG. 269
FIG. 270
FIG. 271
FIG. 272
FIG. 273
FIG. 274
FIG. 275
FIG. 276
FIG. 277
FIG. 278
FIG. 279
FIG. 280
FIG. 281
FIG. 282
FIG. 283
FIG. 284
FIG. 285
FIG. 286
FIG. 287
FIG. 288
FIG. 289
FIG. 290
FIG. 291
FIG. 292
FIG. 293
FIG. 294
FIG. 295
FIG. 296
FIG. 297
FIG. 298
FIG. 299
FIG. 300
FIG. 301
FIG. 302
FIG. 303
FIG. 304
FIG. 305
FIG. 306
FIG. 307
FIG. 308
FIG. 309
FIG. 310
FIG. 311
FIG. 312
FIG. 313
FIG. 314
FIG. 315
FIG. 316
FIG. 317
FIG. 318
FIG. 319
FIG. 320
FIG. 321
FIG. 322
FIG. 323
FIG. 324
FIG. 325
FIG. 326
FIG. 327
FIG. 328
FIG. 329
FIG. 330
FIG. 331
FIG. 332
FIG. 333
FIG. 334
FIG. 335
FIG. 336
FIG. 337
FIG. 338
FIG. 339
FIG. 340
FIG. 341
FIG. 342
FIG. 343
FIG. 344
FIG. 345
FIG. 346
FIG. 347
FIG. 348
FIG. 349
FIG. 350
FIG. 351
FIG. 352
FIG. 353
FIG. 354
FIG. 355
FIG. 356
FIG. 357
FIG. 358
FIG. 359
FIG. 360
FIG. 361
FIG. 362
FIG. 363
FIG. 364
FIG. 365
FIG. 366
FIG. 367
FIG. 368
FIG. 369
FIG. 370
FIG. 371
FIG. 372
FIG. 373
FIG. 374
FIG. 375
FIG. 376
FIG. 377
FIG. 378
FIG. 379
FIG. 380
FIG. 381
FIG. 382
FIG. 383
FIG. 384
FIG. 385
FIG. 386
FIG. 387
FIG. 388
FIG. 389
FIG. 390
FIG. 391
FIG. 392
FIG. 393
FIG. 394
FIG. 395
FIG. 396
FIG. 397
FIG. 398
FIG. 399
FIG. 400
FIG. 401
FIG. 402
FIG. 403
FIG. 404
FIG. 405
FIG. 406
FIG. 407
FIG. 408
FIG. 409
FIG. 410
FIG. 411
FIG. 412
FIG. 413
FIG. 414
FIG. 415
FIG. 416
FIG. 417
FIG. 418
FIG. 419
FIG. 420
FIG. 421
FIG. 422
FIG. 423
FIG. 424
FIG. 425
FIG. 426
FIG. 427
FIG. 428
FIG. 429
FIG. 430
FIG. 431
FIG. 432
FIG. 433
FIG. 434
FIG. 435
FIG. 436
FIG. 437
FIG. 438
FIG. 439
FIG. 440
FIG. 441
FIG. 442
FIG. 443
FIG. 444
FIG. 445
FIG. 446
FIG. 447
FIG. 448
FIG. 449
FIG. 450
FIG. 451
FIG. 452
FIG. 453
FIG. 454
FIG. 455
FIG. 456
FIG. 457
FIG. 458
FIG. 459
FIG. 460
FIG. 461
FIG. 462
FIG. 463
FIG. 464
FIG. 465
FIG. 466
FIG. 467
FIG. 468
FIG. 469
FIG. 470
FIG. 471
FIG. 472
FIG. 473
FIG. 474
FIG. 475
FIG. 476
FIG. 477
FIG. 478
FIG. 479
FIG. 480
FIG. 481
FIG. 482
FIG. 483
FIG. 484
FIG. 485
FIG. 486
FIG. 487
FIG. 488
FIG. 489
FIG. 490
FIG. 491
FIG. 492
FIG. 493
FIG. 494
FIG. 495
FIG. 496
FIG. 497
FIG. 498
FIG. 499
FIG. 500
FIG. 501
FIG. 502
FIG. 503
FIG. 504
FIG. 505
FIG. 506
FIG. 507
FIG. 508
FIG. 509
FIG. 510
FIG. 511
FIG. 512
FIG. 513
FIG. 514
FIG. 515
FIG. 516
FIG. 517
FIG. 518
FIG. 519
FIG. 520
FIG. 521
FIG. 522
FIG. 523
FIG. 524
FIG. 525
FIG. 526
FIG. 527
FIG. 528
FIG. 529
FIG. 530
FIG. 531
FIG. 532
FIG. 533
FIG. 534
FIG. 535
FIG. 536
FIG. 537
FIG. 538
FIG. 539
FIG. 540
FIG. 541
FIG. 542
FIG. 543
FIG. 544
FIG. 545
FIG. 546
FIG. 547
FIG. 548
FIG. 549
FIG. 550
FIG. 551
FIG. 552
FIG. 553
FIG. 554
FIG. 555
FIG. 556
FIG. 557
FIG. 558
FIG. 559
FIG. 560
FIG. 561
FIG. 562
FIG. 563
FIG. 564
FIG. 565
FIG. 566
FIG. 567
FIG. 568
FIG. 569
FIG. 570
FIG. 571
FIG. 572
FIG. 573
FIG. 574
FIG. 575
FIG. 576
FIG. 577
FIG. 578
FIG. 579
FIG. 580
FIG. 581
FIG. 582
FIG. 583
FIG. 584
FIG. 585
FIG. 586
FIG. 587
FIG. 588
FIG. 589
FIG. 590
FIG. 591
FIG. 592
FIG. 593
FIG. 594
FIG. 595
FIG. 596
FIG. 597
FIG. 598
FIG. 599
FIG. 600
FIG. 601
FIG. 602
FIG. 603
FIG. 604
FIG. 605
FIG. 606
FIG. 607
FIG. 608
FIG. 609
FIG. 610
FIG. 611
FIG. 612
FIG. 613
FIG. 614
FIG. 615
FIG. 616
FIG. 617
FIG. 618
FIG. 619
FIG. 620
FIG. 621
FIG. 622
FIG. 623
FIG. 624
FIG. 625
FIG. 626
FIG. 627
FIG. 628
FIG. 629
FIG. 630
FIG. 631
FIG. 632
FIG. 633
FIG. 634
FIG. 635
FIG. 636
FIG. 637
FIG. 638
FIG. 639
FIG. 640
FIG. 641
FIG. 642
FIG. 643
FIG. 644
FIG. 645
FIG. 646
FIG. 647
FIG. 648
FIG. 649
FIG. 650
FIG. 651
FIG. 652
FIG. 653
FIG. 654
FIG. 655
FIG. 656
FIG. 657
FIG. 658
FIG. 659
FIG. 660
FIG. 661
FIG. 662
FIG. 663
FIG. 664
FIG. 665
FIG. 666
FIG. 667
FIG. 668
FIG. 669
FIG. 670
FIG. 671
FIG. 672
FIG. 673
FIG. 674
FIG. 675
FIG. 676
FIG. 677
FIG. 678
FIG. 679
FIG. 680
FIG. 681
FIG. 682
FIG. 683
FIG. 684
FIG. 685
FIG. 686
FIG. 687
FIG. 688
FIG. 689
FIG. 690
FIG. 691
FIG. 692
FIG. 693
FIG. 694
FIG. 695
FIG. 696
FIG. 697
FIG. 698
FIG. 699
FIG. 700
FIG. 701
FIG. 702
FIG. 703
FIG. 704
FIG. 705
FIG. 706
FIG. 707
FIG. 708
FIG. 709
FIG. 710
FIG. 711
FIG. 712
FIG. 713
FIG. 714
FIG. 715
FIG. 716
FIG. 717
FIG. 718
FIG. 719
FIG. 720
FIG. 721
FIG. 722
FIG. 723
FIG. 724
FIG. 725
FIG. 726
FIG. 727
FIG. 728
FIG. 729
FIG. 730
FIG. 731
FIG. 732
FIG. 733
FIG. 734
FIG. 735
FIG. 736
FIG. 737
FIG. 738
FIG. 739
FIG. 740
FIG. 741
FIG. 742
FIG. 743
FIG. 744
FIG. 745
FIG. 746
FIG. 747
FIG. 748
FIG. 749
FIG. 750
FIG. 751
FIG. 752
FIG. 753
FIG. 754
FIG. 755
FIG. 756
FIG. 757
FIG. 758
FIG. 759
FIG. 760
FIG. 761
FIG. 762
FIG. 763
FIG. 764
FIG. 765
FIG. 766
FIG. 767
FIG. 768
FIG. 769
FIG. 770
FIG. 771
FIG. 772
FIG. 773
FIG. 774
FIG. 775
FIG. 776
FIG. 777
FIG. 778
FIG. 779
FIG. 780
FIG. 781
FIG. 782
FIG. 783
FIG. 784
FIG. 785
FIG. 786
FIG. 787
FIG. 788
FIG. 789
FIG. 790
FIG. 791
FIG. 792
FIG. 793
FIG. 794
FIG. 795
FIG. 796
FIG. 797
FIG. 798
FIG. 799
FIG. 800
FIG. 801
FIG. 802
FIG. 803
FIG. 804
FIG. 805
FIG. 806
FIG. 807
FIG. 808
FIG. 809
FIG. 810
FIG. 811
FIG. 812
FIG. 813
FIG. 814
FIG. 815
FIG. 816
FIG. 817
FIG. 818
FIG. 819
FIG. 820
FIG. 821
FIG. 822
FIG. 823
FIG. 824
FIG. 825
FIG. 826
FIG. 827
FIG. 828
FIG. 829
FIG. 830
FIG. 831
FIG. 832
FIG. 833
FIG. 834
FIG. 835
FIG. 836
FIG. 837
FIG. 838
FIG. 839
FIG. 840
FIG. 841
FIG. 842
FIG. 843
FIG. 844
FIG. 845
FIG. 846
FIG. 847
FIG. 848
FIG. 849
FIG. 850
FIG. 851
FIG. 852
FIG. 853
FIG. 854
FIG. 855
FIG. 856
FIG. 857
FIG. 858
FIG. 859
FIG. 860
FIG. 861
FIG. 862
FIG. 863
FIG. 864
FIG. 865
FIG. 866
FIG. 867
FIG. 868
FIG. 869
FIG. 870
FIG. 871
FIG. 872
FIG. 873
FIG. 874
FIG. 875
FIG. 876
FIG. 877
FIG. 878
FIG. 879
FIG. 880
FIG. 881
FIG. 882
FIG. 883
FIG. 884
FIG. 885
FIG. 886
FIG. 887
FIG. 888
FIG. 889
FIG. 890
FIG. 891
FIG. 892
FIG. 893
FIG. 894
FIG. 895
FIG. 896
FIG. 897
FIG. 898
FIG. 899
FIG. 900
FIG. 901
FIG. 902
FIG. 903
FIG. 904
FIG. 905
FIG. 906
FIG. 907
FIG. 908
FIG. 909
FIG. 910
FIG. 911
FIG. 912
FIG. 913
FIG. 914
FIG. 915
FIG. 916
FIG. 917
FIG. 918
FIG. 919
FIG. 920
FIG. 921
FIG. 922
FIG. 923
FIG. 924
FIG. 925
FIG. 926
FIG. 927
FIG. 928
FIG. 929
FIG. 930
FIG. 931
FIG. 932
FIG. 933
FIG. 934
FIG. 935
FIG. 936
FIG. 937
FIG. 938
FIG. 939
FIG. 940
FIG. 941
FIG. 942
FIG. 943
FIG. 944
FIG. 945
FIG. 946
FIG. 947
FIG. 948
FIG. 949
FIG. 950
FIG. 951
FIG. 952
FIG. 953
FIG. 954
FIG. 955
FIG. 956
FIG. 957
FIG. 958
FIG. 959
FIG. 960
FIG. 961
FIG. 962
FIG. 963
FIG. 964
FIG. 965
FIG. 966
FIG. 967
FIG. 968
FIG. 969
FIG. 970
FIG. 971
FIG. 972
FIG. 973
FIG. 974
FIG. 975
FIG. 976
FIG. 977
FIG. 978
FIG. 979
FIG. 980
FIG. 981
FIG. 982
FIG. 983
FIG. 984
FIG. 985
FIG. 986
FIG. 987
FIG. 988
FIG. 989
FIG. 990
FIG. 991
FIG. 992
FIG. 993
FIG. 994
FIG. 995
FIG. 996
FIG. 997
FIG. 998
FIG. 999
FIG. 1000

PARTS LIST

10	printer apparatus
12	receiver
14	colorant donor element
16	tray
18	platen
20	actuator
24	supply roller
26	take-up roller
28	drive mechanism
30	control unit
32	computer
34	laser light source
38	optical system
50	image receiving structure
56	support
60	image receiving layer
62	hydrophobic protective layer
64a	cyan patch
64b	yellow patch
64c	magenta patch
66	protective coating patch
69	arrow
70	hydrophilic mixture
72	applicator assembly
74	reservoir
76	applicator
78	drive mechanism
80	hydrophilic coating

Parts List cont'd

- 82 thermal printer
- 84 thermal print
- 88 rubber stamp
- 90 information image
- 110 hydrophilic patch

82
84
88
90
110

WHAT IS CLAIMED IS:

1. A receiver for receiving a water-based colorant image transferred by a stamp or the like, comprising:
 - (a) an image receiving structure having:
 - (i) a support;
 - (ii) an information receiving layer which contains recorded information, such information receiving layer being formed over the support; and
 - (iii) a clear hydrophobic protective layer formed over the information receiving layer; and
 - (b) a hydrophilic layer formed over the information receiving layer and selected so as to be able to receive a water-based colorant image.
2. A receiver for receiving a water-based colorant image transferred by a stamp or the like, comprising:
 - (a) an image receiving structure having:
 - (i) a support;
 - (ii) a barrier layer formed over the support;
 - (iii) an information receiving layer which contains recorded information, such information receiving layer being formed over the barrier layer; and
 - (iv) a clear hydrophobic protective layer formed over the information receiving layer; and
 - (b) a hydrophilic layer formed over the information receiving layer and selected so as to be able to receive a water-based colorant image.
3. A method for forming a receiver which is adapted to receive a water-based colorant image transferred by a stamp or the like, comprising:
 - (a) providing an image receiving structure having:
 - (i) a support; and
 - (ii) an information receiving layer which is adapted to receive recorded information, such information receiving layer being formed over the support; and

- (b) forming information in the information receiving layer;
- (c) forming a clear hydrophobic protective layer over the information receiving layer;
- (d) forming a hydrophilic layer over the information receiving layer and selected so as to be able to receive a water-based colorant image; and
- (e) forming a water-based colorant image in the hydrophilic layer.

4. The method according to claim 3 wherein the water-based colorant is selected from the group consisting of water based ink and water-based pigment.

5. The method according to claim 3 wherein the hydrophilic layer includes gelatin formulated with surfactants.

6. The method according to claim 3 wherein the hydrophilic layer is selected from the group consisting of polyvinylpyrrolidone (PVP), polyester ionomers, polyethylene oxide and copolymers of vinyl alcohol.

7. The method according to claim 3 wherein the hydrophilic layer is formed by the steps of:

- (i) moving a colorant donor element having a plurality of transferable colorant patches and a patch having hydrophilic material into transferable relationship with the receiver;
- (ii) transferring colorants from colorant patches to the image receiving layer; and
- (iii) transferring hydrophilic material from the hydrophilic patch.

8. The method according to claim 7 wherein the colorant patches in the donor are cyan, magenta and yellow which are applied sequentially applied to the image receiving layer.

9. The method according to claim 3 further including the steps of:

- (i) moving a colorant donor element having a plurality of transferable colorants in colorant patches , a protective patch and a hydrophilic

patch into transferable relationship with the receiver;

(ii) transferring colorants from the colorant patches to the image receiving layer;

(iii) transferring material from the protective patch to form a protective layer; and

(iv) transferring a hydrophilic material from the hydrophilic patch onto the image receiving layer to form the clear hydrophobic layer on the image receiving layer.

10. The method according to claim 9 wherein the water-based colorant is selected from the group consisting of water based ink and water-based pigment.

11. The method according to claim 9 wherein the hydrophilic layer includes gelatin formulated with surfactants.

12. The method according to claim 9 wherein the hydrophilic layer is selected from the group consisting of polyvinylpyrrolidone (PVP), polyester ionomers, polyethylene oxide and copolymers of vinyl alcohol.

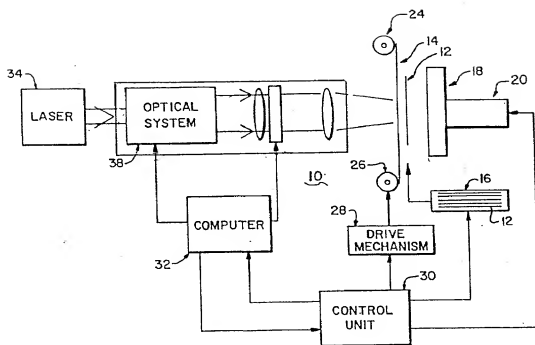


FIG. 1

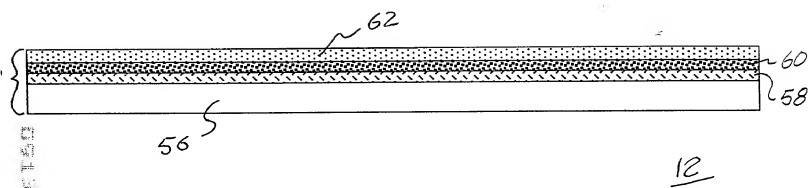


FIG. 2

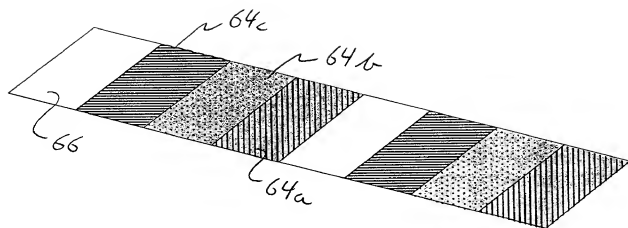


FIG. 3

14

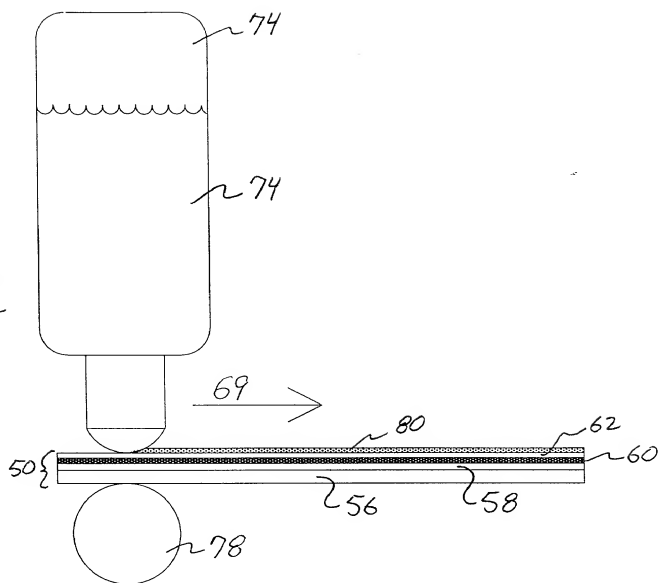


FIG. 4




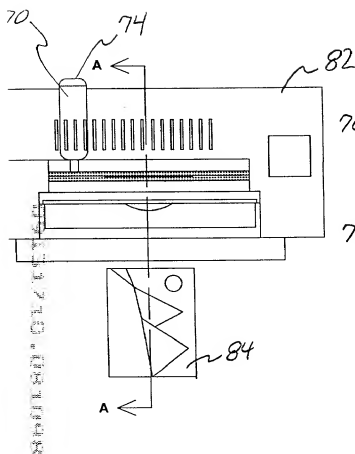


FIG. 5

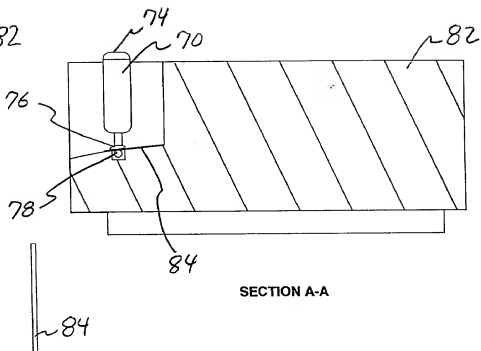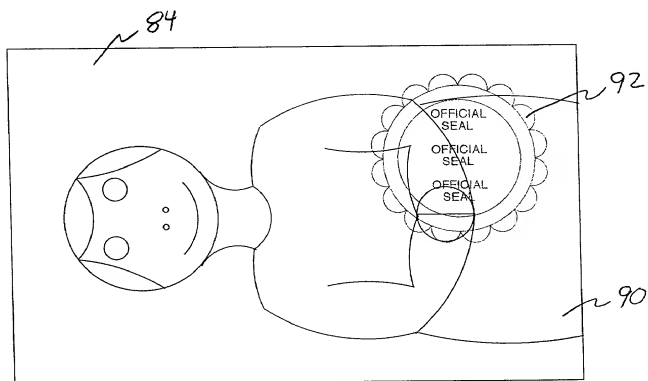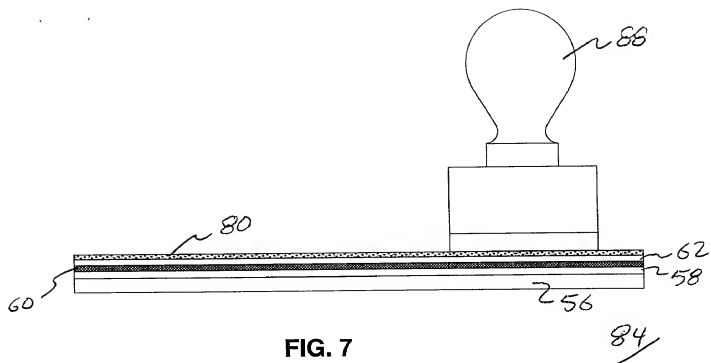

SECTION A-A

FIG. 6



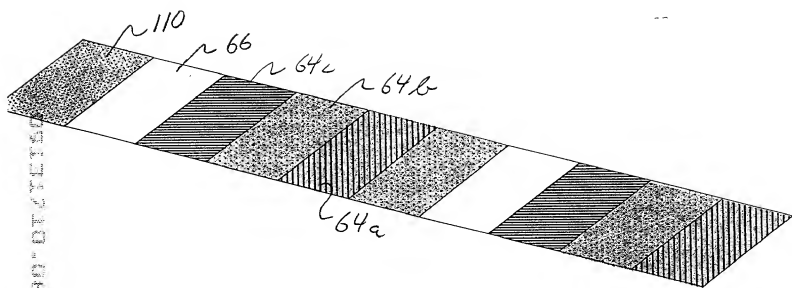


FIG. 9

Combined Declaration For Patent Application and Power of Attorney

ATTORNEY DOCKET
78137RLO

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

RECEIVER HAVING HYDROPHILIC RECEIVING SURFACE

The specification of which (check only one item below):

- ☒ is attached hereto.
- ☐ was filed as United States Application Serial No. on and was amended on (if applicable).
- ☐ was filed as PCT international application Number on and was amended under PCT Article 19 on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent & Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign applications(s) for patent or inventor's certificate or any PCT international application(s) designating a least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (if PCT, indicate PCT)	APPLICATION NUMBER	DATE OF FILING (MM/DD/YYYY)	PRIORITY CLAIMED UNDER 35 USC §119			
			<input type="checkbox"/>	YES	<input type="checkbox"/>	NO
			<input type="checkbox"/>	YES	<input type="checkbox"/>	NO
			<input type="checkbox"/>	YES	<input type="checkbox"/>	NO

I hereby claim the benefit under Title 35, United States Code, §119 (e) of any United States provisional application(s) listed below:

PRIOR PROVISIONAL APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119 (e):

PROVISIONAL APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, §120 of any prior United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, §112, I acknowledge the duty to disclose to the U.S. Patent & Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR US APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 USC §120:

U.S. APPLICATIONS			STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			

Combined Declaration For Patent Application and Power of Attorney (Continued)				ATTORNEY DOCKET 78137RLO
<p>POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (<i>List name and registration number</i>)</p> <p style="text-align: center;"> Raymond L. Owens, Registration No. 22,363 Thomas H. Close, Registration No. 27,428 J. Lanny Tucker, Registration No. 27,678 Sarah Meeks Roberts, Registration No. 33,447 Arthur H. Rosenstein, Registration No. 24,352 Milton S. Sales, Registration No. 24,516 </p>				
<p>Send Correspondence to:</p> <p style="text-align: center;"> Thomas H. Close Eastman Kodak Company Patent Legal Staff Rochester, NY 14650-2201 </p>				<p>Direct Telephone Calls to: (name and telephone number)</p> <p style="text-align: center;"> Raymond L. Owens (716) 477-4653 FAX: (716) 477-4646 </p>
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
1	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
2	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
3	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
4	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
5	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
6	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>				
SIGNATURE OF INVENTOR 201		SIGNATURE OF INVENTOR 202		SIGNATURE OF INVENTOR 203
DATE		DATE		DATE
08/06/98		07/03/98		7-9-98
SIGNATURE OF INVENTOR 204		SIGNATURE OF INVENTOR 205		SIGNATURE OF INVENTOR 206
DATE		DATE		DATE